

Agorata

LEV CHIZHOV^{1,2}

@ennucore

July 26, 2022

Abstract

Agorata is an implementation of the idealized economic agent, or, specifically, an aggregator of smart contracts. It combines one or more contracts proposed by the members of the network in a deal which can be evaluated as profitable for Agorata with low risks. Using this approach, Agorata can provide infrastructure for loans, flashloans, bets, derivatives, bridging between chains, and many more financial instruments.

CONTENTS

I	Introduction and overview	2
II	Decision-making strategy	2
i	Deal representation	2
ii	Agent parameters	3
iii	Deal evaluation	3
iv	Examples	4
III	Contract evaluation algorithms	4
i	The formal representation	5
ii	Building the formal representation	5
iii	Considering the deal	5
IV	Applications	5
i	Flashloans	5
ii	Loans	5
iii	Bridges	5
iv	Bets	5
v	Derivatives	5
vi	More complex examples and other usages	5
V	Conclusion	5

¹ Moscow Institute of Physics and Technology

² Ludwig-Maximilians-Universität München

I. INTRODUCTION AND OVERVIEW

There is a variety of standard financial organizations that provide their capital for some simple purely financial deals: banks, brokers, gambling institutions, betting institutions, and many more. Most of them have their own DeFi counterparts, as well as some services that are only possible on the blockchain — for example, flashloans.

All of these organizations can be generalized to an economic agent that has a utility function and accepts a proposed deal if and only if it is the most beneficial in terms of this function. These particular implementations, however, only consider a very limited subset of deals. Also, all of them work only with purely financial deals which include not more than 3 parties¹, including the financial organization.

Technologies of decentralization and smart contracts in particular provide the foundation for a much more fundamental entity — one which goes far beyond standard simple templated purely-financial deals. Instead, this entity can be the implementation of the general economic agent. It can analyze deal proposals and their combinations into more complex deals (for example, combining two proposal in a risk-free deal, like with betting), which it evaluates and participates in. As a result, this entity can serve as a liquidity provider, loan broker, a service for finding a counterparty. It is worth noticing that as the blockchain technologies spread into multiple fields (not only financial), a service like that can become much more versatile and participate in deals including various assets (domain names, art, computational resources are the examples of what can be possible now, future applications will go much further).

The goal of this whitepaper is to present such an entity — Agorata.

II. DECISION-MAKING STRATEGY

In this chapter, the strategy for making decisions is described.

i. Deal representation

A deal proposal is made by the user in the form of a smart contract. A smart contract is considered as an entity with which other entities (users, smart contracts) can interact via messages². For a state of the contract we can determine the messages that can be sent to the contract and for each of them — the response messages and the next state. The deal is represented as a tree with states as leafs and actions (messages) as edges. Depending on the actions, the deal has a total outcome — the number of tokens that were gained/spent by the agent.

Each action (message) has parameters θ , including:

1. s — the sender of the message.
2. t — the time (block number) at which the message is sent (may be omitted in the representation if it is unimportant).
3. tokens sent with the message.
4. any other possible information.

¹An example of such a deal with three parties is a standard deal on a financial market.

²The message concept used here is from The Open Network (TON). A message can include tokens, commands, information, code.

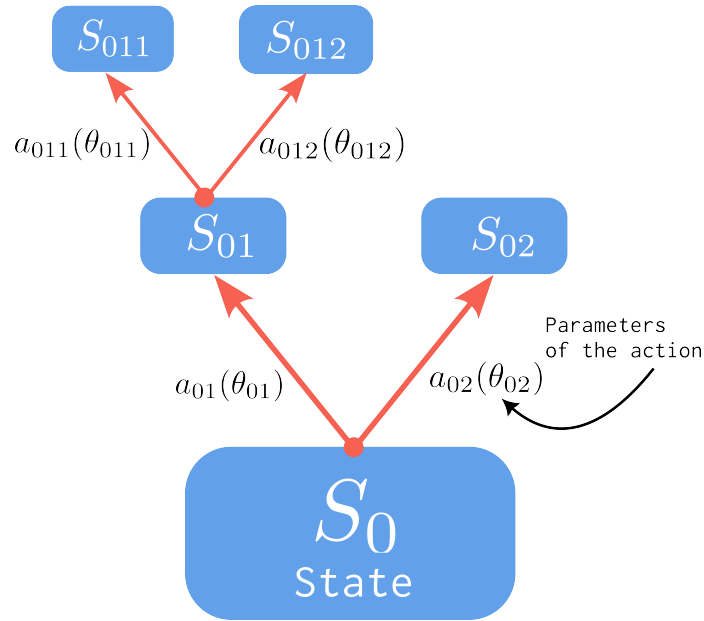


Figure 1: Deal representation.

The parameter space for each action can be constrained — the smart contract can reject some of the messages. For instance, this can lead to the entire space consisting of a single element (the contract rejects everything except for one specific message, e.g. a specific person sending a specific amount of tokens).

The main parameters of the state are the financial outcomes for the smart contracts. The state is written as a function of all parameters of all actions in a formal language.

ii. Agent parameters

1. T_0 is the maximum deal duration — i.e., the horizon after which the benefits of the deal are not considered.
2. τ is the characteristic time of discount — $\exp(\frac{1 \text{ year}}{\tau}) - 1$ is the minimal yearly rate for a loan.
3. r is the risk parameter for currency switching — the agent will only agree to swap no less than $(1 + r)x$ in one currency for x in another.

Given these parameters, the value function $V((x_i), (t_i))$ (or $V(S)$) can be determined. It takes the sequence of values (x_i, t_i) , where x_i are the incoming/outcoming tokens from the agent.

iii. Deal evaluation

The agent considers the worst case of the deal from the perspective of game theory: the best (from the perspective of the value function) actions of the agent and the “worst” actions of the counteragents. This sequence of events is the run through the value function in order to make a decision.

Thus, a deal is considered profitable for the agent (denoted by A) $\stackrel{\text{def}}{\iff} p(S_i) \iff$

$$V(S_i) > 0 \vee (\forall a_{ij}(p(S_{ij}) \vee a.s = A) \wedge \exists a_{ij} : V(S_{ij}) > 0)$$

Here, S_i is state that is analyzed (the state includes the token movements to and from the agent), a_{ij} are the possible actions (messages) in that state. The function $V(S)$ is the value function which analyzes the token movements in terms of profitability.

The algorithm starts at the node S_0 , then considers all the possible actions (including the absence of one) and calls the algorithm at S_{0i} . If there is any action of the counteragent that makes the contract non-profitable for the agent, the deal is considered non-profitable. If there is no possible action and the state includes profit for the agent, the deal is considered acceptable.

iv. Examples

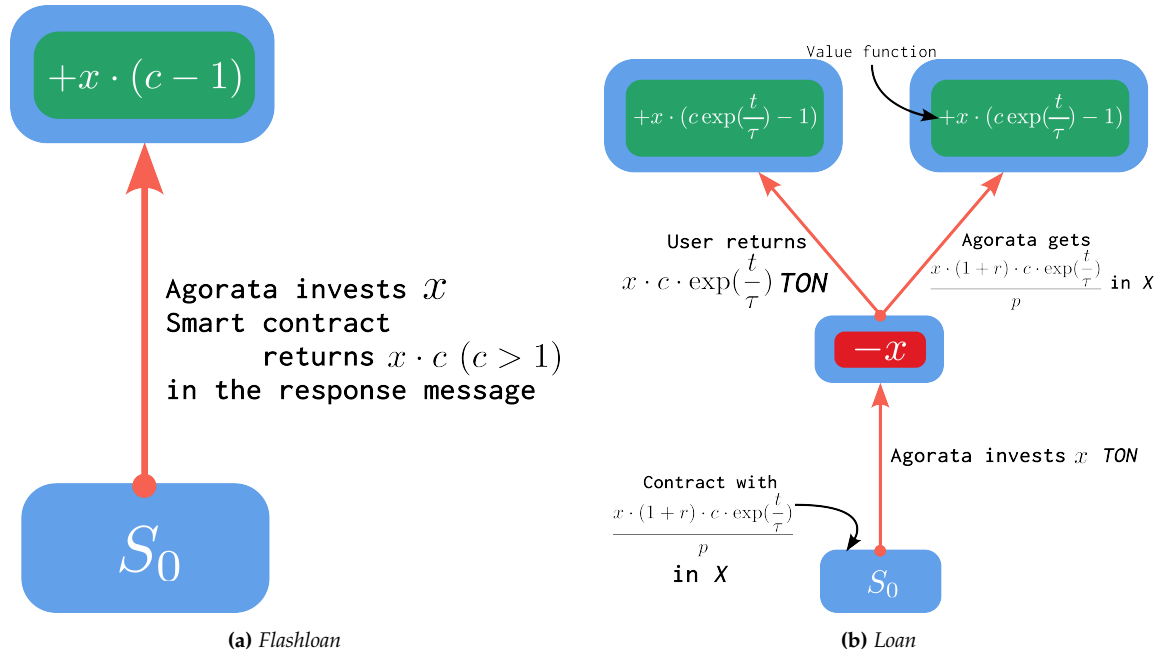


Figure 2: Graphs for some simple contracts

III. CONTRACT EVALUATION ALGORITHMS

In the previous section of the article we specified how the decisions are made. One of the most important parts of the process is finding out whether there exists any action that makes the deal profitable or unprofitable. It is also important to know which actions the agent should make to maximize its output. How do we do that?

The state parameters are represented as functions of action parameters expressed in a formal language. This allows to make all the decision based on mathematically proven algorithms.

The algorithm for evaluating a path the deal can take has these main states:

1. Building the formal algorithm from the contract code

2. Finding the optimal language using the formal language

i. The formal representation

The contract is represented as an actor with several states (a finite number of states which can have parameters — i.e., variables in the contract) that can receive several (a finite number of) types of messages and change the state. Each message has a fixed form with parameters and the output state, which parameters depend on the parameters of the message. This dependency is characterized by an algorithm in the form of code in a pure subset of Lisp — A-Lisp³.

At first, the states and messages will not have parameters. The contract, therefore, will be a finite state machine. For that, the contract will have to check the incoming message on being in the list of allowed messages.

ii. Building the formal representation

At the first stages of the project, the formal representation will be obtained in two ways:

- Pattern matching on the Fift code for standard contracts made from templates
- The creation of the contract performed by the user through the constructor on the Agorata website

Pattern matching will be based on a set of templates with fields. Most prevalent field types will be addresses, token types, and amounts. This algorithm will be able to recognize proposals of many types, including loans, derivative, flashloans, bets. For example, for a loan the parameters are the two involved tokens, sums in them, participating address.

iii. Considering the deal

IV. APPLICATIONS

i. Flashloans

ii. Loans

iii. Bridges

iv. Bets

v. Derivatives

vi. More complex examples and other usages

Agorata can also be used as a platform for looking for a counteragent for a deal. As a service, it will also feature a constructor of smart contracts from the formal language (or its graphical, no-code, representation). This is an extremely useful service since writing programs in FunC is complex, while the logic in most cases is simple.

V. CONCLUSION

³The choice of Lisp is motivated primarily by the fact that it is a good unified way to represent an algorithm. There are also ways to use Lisp programs in formal proofs